



Pneumatic tool accessories

All new Signode pneumatic tools are supplied with a quick-disconnect plug. A filter and regulator are needed with all Signode pneumatic sealers. A filter-regulator-lubricator is needed with pneumatic tensioners and combination tools. These additional fittings and air hoses are available from Signode to help provide optimum operation.

Recommended air hose for pneumatic tools: 10' x 1/2" (3.0m x 12 mm) i.d. **(Part No. 424774)**

Note: Use light hydraulic oil in lubricator, such as Non-Fluid Oil No. LS-1236 (Part No. 008556) or equivalent.

Filter-Regulator-Lubricator assembly
(Part No. 424773)

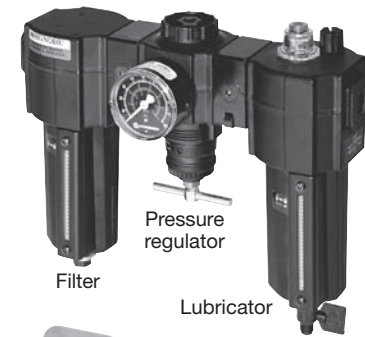

Regulator mounting bracket
(Part No. 071982)



Quick-disconnect socket 3/8" (9.5 mm) i.d.
(Part No. 008569). Lubricator fitting for hose connection.



Quick-disconnect socket 1/4" (6.4 mm) i.d. **(Part No. 020706)**. Hose fitting for tool connection.



Quick-disconnect plug 1/4" (6.4 mm) i.d. **(Part No. 008568)**. Hose fitting for lubricator connection.



Quick-disconnect plug 1/4" (6.4 mm) i.d. **(Part No. 020704)**. Tool fitting for hose connection.



Y-fitting **(Part No. 008574)** for operating two tools simultaneously.